

09/22/99
JC586 U.S. PTO

Express Mail Label No.: EL443489750US

PATENT

Case Docket No.: 99 P 7818 US

Date: September 22, 1999

A

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231
Box PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent
application of:

Inventor: Hsu et al.

For: A GENERALIZED SYSTEM FOR AUTOMATICALLY
HYPERLINKING MULTIMEDIA PRODUCT DOCUMENTS

This application includes:

35 pages: specification and claims
15 sheets of drawings, formal/ X informal
 photographs

Also enclosed is:

 Declaration and Power of Attorney
 Information Disclosure Statement pursuant to 37 CFR 1.56.

The filing fee has been calculated as shown below:

FOR:	(Col. 1) NO. FILED	(Col. 2) NO. EXTRA RATE	OTHER THAN A SMALL ENTITY FEE
BASIC FEE	XXXXXXXX	XXXXXXXXXX	XXXXX \$760.
TOTAL CLAIMS	26 - 20 =	6	x 18.= \$108.
INDEP CLAIMS	6 - 3 =	3	x 78= \$234.
* MULTIPLE DEPENDENT CLAIM PRESENTED			+260.= \$0.
			TOTAL \$1102.

- X Please charge my Deposit Account No. 19-2179 in the amount of \$1102.00. A duplicate copy of this sheet is enclosed.
- X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 19-2179. A duplicate copy of this sheet is enclosed.
- X Any additional filing fees required under 37 CFR 1.16.
- X Any patent application processing fees under 37 CFR 1.17.
- X The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 19-2179. A duplicate copy of this sheet is enclosed.
- X Any patent application processing fees under 37 CFR 1.17.
- X Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Donald B. Paschburg
Donald B. Paschburg
Registration No. 33,753

Siemens Corporation
Intellectual Property Department
186 Wood Avenue South
Iselin, NJ 08830
Tel. (732) 321-3191

JC572 U.S. PTO
09/22/99
09/22/99

09401382 092299

**APPLICATION FOR LETTERS PATENT
OF THE UNITED STATES**

NAME OF INVENTORS: LIANG-HUA HSU
4 ORLY COURT
ROBBINSVILLE, NJ 08691
UNITED STATES OF AMERICA

PEIYA LIU
39 DAVISON AVENUE
EAST BRUNSWICK, NJ 08816
UNITED STATES OF AMERICA

TITLE OF INVENTION: **A GENERALIZED SYSTEM FOR AUTOMATICALLY
HYPERLINKING MULTIMEDIA PRODUCT
DOCUMENTS**

TO WHOM IT MAY CONCERN, THE FOLLOWING IS
A SPECIFICATION OF THE AFORESAID INVENTION

09404382 0929

A GENERALIZED SYSTEM FOR AUTOMATICALLY
HYPERLINKING MULTIMEDIA PRODUCT DOCUMENTS

5

Background of the Invention

Field of the Invention

The present invention relates to automatically
10 hyperlinking multimedia product documents and more
particularly to a generalized hyperlinking system to
create hyperlinks interactively, one at a time, or
automatically, in mass production, statically, at
authoring time, or dynamically, at browsing time.

15

Description of the Prior Art

Due to the growing popularity of the World Wide Web
in recent years, hyperlinking has become a viable
mechanism to access information in many applications on
20 local machines, an intranet, and the Internet. In
manufacturing, product documents are now being provided
in electronic form on CDs and over networks to the
engineers and customers. Typically, product documents in
different media (including text, images, schematic
25 diagrams, CAD drawings, audio, video, etc.) are
identified and linked together manually, so that when
browsing one document, related documents can be easily
retrieved. Since textual documents can usually be
represented (or exported) in the ASCII format, further
30 processing can be performed manually or automatically to
identify words and phrases to be linked to other textual
and non-textual documents. In advanced multimedia
documentation systems, non-textual documents are also

processed with graphics and imaging algorithms to extract useful information which can also be represented in some ASCII form to facilitate further processing such as querying and hyperlinking.

- 5 In order to fully utilize technical contents to support various product-related activities and improve interchangeability of product information among vendors, standard markup languages such as HTML, SGML and XML are being used to represent product documents in all media.
- 10 HTML is described in HTML 4.0 Reference Specification, W3C Recommendation, April 1998. SGML is described in SGML, ISO 8879:1986 Text and Office Systems-Standard Generalized Markup Language, Geneva, 1986. XML is described in XML 1.0 Reference Specification, W3C
- 15 Recommendation, February 1998. SGML-based product documents are well-structured for specific application domains such that technical contents can be more precisely identified and related to one another. In general, an SGML document is a hierarchical structure of
- 20 document objects of all types of media. A document hyperlink is a relationship between two document objects within a document or across two different documents. Some examples of hyperlinks within and across documents are shown in Figure 1.
- 25 A complete hyperlinking process involves three major tasks: *link authoring*, *link management*, and *link browsing*. Link authoring refers to the task of recognizing the relationships between two document objects and generating the link information. Link
- 30 management refers to the task of storing link information to support link authoring, link browsing and other applications. Link browsing refers to the task of activating links to retrieve the needed information.

These three tasks can be performed separately or in one single step, depending on the applications and the complexity of hyperlinking supported.

5 In the link authoring process, there are three technical issues to be addressed: when to create the links, how to identify sources and destinations and what link information to be recorded. Currently, most multimedia tools that support hyperlinking allow the author to interactively select a segment of text or an
10 object in a document as a source or destination, and insert some form of identification of the destination in the source or in a separate file. Thus, a link is established between the source object in one document and the destination object in another (same or different
15 document). Such an interactive link-editing method is sufficient for a small number of arbitrary links, however, the process can be laborious and error-prone for handling a large amount of documents for a complex product. A hyperlink that relates only one pair of
20 source and destination in an arbitrary manner and cannot be generalized to relate a large number of source-destination pairs, is referred to as a *trivial link*. Trivial links can be easily captured with interactive link-editing tools at either authoring time or browsing
25 time.

An automatic hyperlinking system is disclosed in US Patent Number 5,794,257 entitled "Automatic Hyperlinking On Multimedia By Compiling Link Specifications" issued on August 11, 1998 and assigned to the same assignee as the
30 present invention. This system supports hyperlinking in a large amount of product documents. Since product documents are well-structured and often refer to one another through precisely-defined technical terms, it is

09401332, 092299

contributed by individual organizations voluntarily and scattered across five continents. The structure of the (destination) documents is defined arbitrarily by the owners and all document contents and structures can
5 change any time. Thus, it is not practical to attempt to verify the destinations at authoring time (other than manually browsing the destination Web sites), or ensure the existence of the destination documents at browsing time. In this case, URLs that refer to the "home pages"
10 (i.e., entry points to Web sites) are used at authoring time. When such documents are browsed, the document browser makes use of the information in a URL to contact the destination site and attempt to retrieve the needed document.

15 In general, hyperlinks to destination information that cannot be precisely identified and guaranteed are referred to as *semi-links*. Although semi-links do not provide the same quality to the end users as *fully verified links*, it is simple to generate at authoring
20 time and flexible to apply at browsing time. Typically, some information from the source objects is extracted as link information and the document browser, based on such link information, can do whatever is necessary to retrieve the destination information without being
25 completely bound to what is specified at authoring time. For example, based on the id. of a machine part together with an indication of the type of product information needed, a document browser can issue a query to the product document database to retrieve the relevant
30 information and present it to the user. As in Web applications, this type of link remains "valid" (as long as there are some documents existing at the destinations) at all times, even if the information in the product

document database is updated frequently. A hyperlinking process for generating semi-links is referred to as *partial hyperlinking*.

5 In addition to the uncertainty of destination documents, there are also (source) documents that are created on the fly and cannot be processed "statically" beforehand, e.g., annotations that are added to a document by an expert, messages that are sent back and forth between two engineers, etc. In a manufacturing
10 environment, this type of information has its technical values and often becomes part of the product documentation. Thus, a *dynamic hyperlinking* mechanism is required to allow the viewer of such type of information to identify the source objects of potential links
15 immediately after such "documents" are made available. Due to the nature of this type of document and the time constraint, dynamic hyperlinking applies simple link rules (or built-in knowledge) and inserts semi-links to relate to destination information. Recently, most word
20 processors and desktop publishing software have also incorporated some limited capability of dynamic hyperlinking, e.g., they are able to recognize proprietary document structures, URLs, etc..., and insert appropriate links on the fly automatically.

25 Hyperlinks in non-technical documents mostly relate sources to destinations directly. However, technical documents are complicated structures and information can be related in many different ways directly or indirectly through, for example, a table of contents, a reference
30 lists, etc.... An indirect link goes through one or more intermediate destinations to look up and collect more information before it reaches its final destination. This type of indirect links is referred to as *chain*

links. A chain link can be followed in two different ways, i.e., a document browser can stop at each intermediate destination and give the user a chance to view the intermediate information before moving forward or it can work quietly behind the scene and retrieve only the document at the final destination.

It is an object of the present invention to develop a Generalized Hyperlinking Process (GHP) to address most of the technical issues involved in link authoring, link management, and link browsing as discussed above. In order to support various automation tasks and modularize various steps of the hyperlinking process, it is a further object of the present invention to develop a Generalized Hyperlink Specification Language (GHSL) so that the author can specify patterns and contexts for identifying sources and destinations of links in all media and define link information as interfaces between hyperlinking modules (or tools). In particular, it is an object of the present invention that a GHSL specification be processed by the hyperlinker to generate link instances and link instances are managed by the link manager to support incremental hyperlinking at authoring time and interpreted by the link interpreter to effect hyperlinking behavior at browsing time.

Summary of the Invention

The present invention provides a generalized system for automatically hyperlinking multimedia product documents. In the Generalized Hyperlinking Process (GHP), hyperlinks can be created interactively one a time or automatically in mass production, statically at authoring time or dynamically at browsing time, and

incrementally or one time only. Hyperlinks can relate a source to a destination directly or indirectly through intermediate steps and can be inserted directly into documents or stored separately in a link database.

5 Depending on the applications, hyperlinks can be fully verified at authoring time to ensure the quality of hyperlinking or partially specified to offer flexibility at browsing time. In order to support various automation tasks and modularize various steps of the hyperlinking
10 process, a Generalized Hyperlink Specification Language (GHSL) allows for the author to specify patterns and contexts for identifying sources and destinations of links in all media and define link information as interfaces between hyperlinking modules (or tools). In
15 particular, a GHSL specification is processed by the hyperlinker to generate link instances and link instances are managed by the link manager to support incremental hyperlinking at authoring time and interpreted by the link interpreter to effect hyperlinking behavior at
20 browsing time.

The generalized automatic hyperlinking system comprises a source identifier, a source anchor generator, an initial semi-link generator, an intermediate destination identifier, an intermediate anchor generator,
25 an intermediate link generator, an intermediate semi-link generator, a destination identifier, a final semi-link generator, a final link generator, link management, a link database, a link browser, a link interpreter and a document browser.

Brief Description of the Drawings

Figure 1 illustrates some examples of hyperlinks within and across documents.

5 Figure 2 illustrates a generalized hyperlinking system of the present invention.

Figure 3 illustrates a source specification.

Figure 4 illustrates a pattern specification.

Figure 5 illustrates a context specification.

10 Figure 6 illustrates an anchor specification.

Figure 7 illustrates a link specification.

Figure 8 illustrates examples of a source specification.

15 Figure 9 illustrates an intermediate destination specification.

Figure 10 illustrates a destination specification.

Figure 11 illustrates static hyperlinking of the present invention.

20 Figure 12 illustrates static hyperlinking with intermediate links.

Figure 13 illustrates incremental hyperlinking of the present invention.

Figure 14 illustrates source-level partial hyperlinking of the present invention.

25 Figure 15 illustrates source-level dynamic hyperlinking of the present invention.

Detailed Description of the Invention

30 This patent application is related to copending U.S. patent application entitled "Automatic Generation Of Card-Based Presentation Documents From Multimedia Data", Attorney Docket No. 99P7817US, filed on September 22,

1999 and assigned to the same assignee as the present invention.

Product documents are often related to many other types of documents, e.g., photo images of machine parts, schematic diagrams, CAD drawings, spare parts, etc.... and a source object may be linked to multiple destinations. Thus, a hyperlinking mechanism must also be able to insert multiple links in one single object. The situation can become even more complicated, i.e., if the information for different types of links for the same source are made available (or discovered) at different times throughout the life cycle of the product documents. Thus, incremental hyperlinking is essential. Most of the current multimedia tools do not support multiple links nor incremental hyperlinking. In order to integrate the processing of various types of link information (e.g., object id., URL, database query, etc...), a *link browser* is needed which displays the list of multiple links for a source object and provides the preview capability to avoid accessing unwanted documents such as large CAD drawing images and video files that may require a significant amount of time to retrieve.

In the simplest form, hyperlinking tools insert links into source documents. However, to keep source documents intact, and to facilitate incremental hyperlinking, links are often stored separately in *link files* or *databases*. A *link manager* is needed to manage the link files and provide an API for other authoring and browsing tools to access and update the link information incrementally. When links are inserted into product documents, they usually conform to the HTML or SGML standard; when they are stored separately in link files, they usually conform to the HyTime standard.

662260 " 23 T 0450

A generalized hyperlinking system consists of a sequence of modules for identifying sources and destinations, generating and managing links and activating links to retrieve documents. A generalized hyperlinking system is illustrated in Figure 2. Source identifier 12 parses a source specification to identify the sources of a type of link. In interactive link-editing mode, a source specification can be simply the id. of an object selected in a document (i.e., a trivial link), while in an automatic hyperlinking process, a source specification identifies a pattern and a context for a group of source objects in one or more documents. Based on the findings (i.e., one or more source objects) from source identifier 12, source anchor generator 14 generates anchors that are needed to inform the document browser of potential link sources. In some applications, information from source objects is sufficient to generate links and semi-links can be generated automatically at initial semi-link generator 16. Semi-links can be activated and interpreted by the link browser to effect hyperlinking behavior at browsing time.

For high-quality product documentation, the hyperlinking system continues to search for the destinations of the links at authoring time. In complex documents, it may become necessary to look up intermediate information in other documents before the final destination of the link can be determined. In intermediate destination identifier 18, intermediate hyperlink (destination) specifications are parsed to identify intermediate destinations. Based on the findings (i.e., one or more intermediate destination objects) from intermediate destination identifier 18, intermediate anchor generator 20 generates anchors that

time constraint, dynamic hyperlinking mostly finishes by generating a semi-link at initial semi-link generator 16 so that document browsing can continue at link browser 36 and document browser 40 as soon as possible.

5 The generalized hyperlinking process includes a Generalized Hyperlink Specification Language (GHSL) for the author to specify sources, intermediate destinations, and destinations of hyperlinks. In GHSL, source, intermediate destination, and destination specifications
10 are specified separately. Although not completely independently, they can be saved and processed individually at different stages of the hyperlinking process for different applications and they are related to one another by the information that they extract,
15 generate and store in the link database through the link management API.

 The definition of the source specification is shown in Figure 3. It consists of a label, a list of document references, a list of patterns, a list of contexts, a
20 list of anchors and a list of links. A label is used to uniquely identify a source specification and all anchors and links that are generated from the source specification. Since all information associated with source, intermediate destination and destination
25 specifications is uniquely labeled when stored in the link database, it is possible to separate these three types of specifications and allow them to be processed individually at different stages of the hyperlinking process. A source specification also includes a list of
30 document references (e.g., document file names) of which the document objects are matched against the patterns and contexts that follow.

09401382 092299

context term that is assigned to a variable, such that the variable can be used to refer to the corresponding context later in the specifications. The definition of the context specification is shown in Figure 5. The relationships between a document object and its neighboring objects are hierarchical relationships as listed in Figure 5. A specification of a document object is the same as that in SGML, i.e., it is an object name (or SGML tag) followed by a list of attribute names and attribute values.

A pattern specification together with a context specification identifies a set of document objects as the sources of a type of link in a list of documents. Once a source object is located, an anchor can be inserted in the document and if necessary, link information can be also be generated. An anchor specification specifies a location where an anchor can be inserted in the source document to inform the document browser of the existence of a source object of a type of link. In the generalized method, an anchor specification is represented as a simple form of a structure transformation that transforms a source context into a new context incorporating one anchor object (or more). This is shown in Figure 6. An anchor context is similar to a source context except that objects identified in a source context are often assigned to variables and the variables can be used to refer to the source objects in the anchor context.

A link specification specifies updates to the link information "stored" in the content and attributes of an anchor object. This is shown in Figure 7. Typically, new link information replaces the existing link information in an anchor by the assignment operator "=". Note that "= NULL" removes all existing link information.

To support multiple links and incremental hyperlinking, new link information can also be appended to an anchor by the append operator "+=". A link value is a record of link information and can be any string required by a
5 hyperlinking application or a list of link fields as suggested in Figure 7. To generate a new link, a list of link field assignments is specified and each assigns a value to a specific link field. A full link record can be specified by a sequence of values for all link fields
10 and NULL can be used in the link fields whose values are unspecified.

An example of a source specification is shown in Figure 8. The source specification S101 identifies all KKS numbers (a numbering scheme adopted in the power
15 plant industry) whose pattern is "MB"[A-Z][0-9]2[A-Z]2[0-9]3. The KKS number pattern is also assigned to the variable "p". In order for the pattern "p" to be qualified as a link source, it must also be located in the context of <AnyDocX><ParaX, ParaX2, ParaX3, ParaX4,
20 ParaX5>, where <ParaX, ParaX2, ...> refers to any one of the SGML tags in the list. When such a pattern is found, an anchor <KKSNum> is inserted (if such an anchor does not exist already), whose content is the pattern found. The KKS number anchor is also assigned to the variable
25 "a". A semi-link record can be appended to the Linkend attribute of the KKS number anchor "a".

The definition of the intermediate destination specification is shown in Figure 9. It is similar to that of the source specification except that in order to
30 relate an intermediate destination to its sources and other intermediate destinations, a list of labels for the sources and intermediate destinations is specified at the beginning. Thus, all variables introduced in the

09401382 092299

specified source and intermediate destination specifications are imported to the current intermediate destination specification and all document objects that have been identified by the specified source and
5 intermediate specifications become the sources of the current intermediate destination specification.

The definition of the (final) destination specification is shown in Figure 10. It is the same as that of the intermediate specification except that its
10 label is never used by other specifications and usually its anchor specification is also not necessary. This is because it is the last step of the hyperlinking process for a specific type of link.

The following will describe static and incremental
15 hyperlinking. The generalized hyperlinking process can be used to model *static hyperlinking*, i.e., all hyperlinking information is completely processed and generated at authoring time as opposed to dynamic hyperlinking where all hyperlinking information is
20 completely processed and generated at browsing time. A typical system of static hyperlinking is shown in Figure 11. It consists of source identifier 12, source anchor generator 14, intermediate destination identifier 18, destination identifier 26, final link generator 30 and
25 link management 32 of the generalized process. That is, it involves only the steps of the generalized automatic hyperlinking process to locate the source, all intermediate destinations and the final destination. It generates only the anchors for the source objects and
30 links directly from the sources to the final destinations. Link information is completely verified and generated at authoring time and is managed by the

link manager. The link management API is provided to support link browsing at browsing time.

To support viewing of intermediate destinations in static hyperlinking, anchors and links for intermediate
5 destination can also be generated and managed by the link manager. Static hyperlinking with intermediate links comprises source identifier 12, source anchor generator 14, intermediate destination identifier 18, intermediate anchor generator 20, intermediate link generator 22,
10 destination identifier 26, final link generator 30 and link management 32. This is shown in Figure 12. As described above, the link browser can provide two different browsing styles for links that involve intermediate destinations. That is, it can automatically
15 follow all the intermediate destinations to reach the final destination directly or it can prompt the user at one or more of the intermediate destinations, depending on the applications.

There are two aspects of incremental hyperlinking
20 that can be supported: processing source and destination objects incrementally and updating link instances incrementally. Since the generalized hyperlinking process is well-modularized, incremental hyperlinking can be easily supported by storing all anchor and link
25 information in the link database, managing them by the link manager and providing the link management APIs to all link authoring and browsing modules. This is shown in Figure 13. Incremental hyperlinking comprises source identifier 12, source anchor generator 14, intermediate
30 destination identifier 18, intermediate anchor generator 20, intermediate link generator 22, destination identifier 26, final link generator 30, link management 32 and link database 34. On the other hand, since the

GHSL is also "well-modularized", anchor and link information generated at all stages can be stored and managed incrementally so that new anchors and links can be appended to (or existing anchors and links can be removed from) the link database at any time during the life span of the product documents.

Link changes are caused by either link rule changes or document changes. Link rules are changed due to the fact that new link rules are created or existing link rules are revised or become obsolete. In this case, it is possible to process the new link rules or revised rules to "incrementally" update the link instances in the link database accordingly. Similarly, during the lifetime of a product, new product documents may be created or existing product documents may be revised or become obsolete. In this case, link rules whose sources, intermediate destinations or destinations are located in the affected documents are re-processed and link instances in the link database are incrementally updated accordingly.

The following will describe partial and dynamic hyperlinking. The generalized hyperlinking process can be applied to partial hyperlinking at three different stages, i.e., it is possible to generate links at source level, intermediate destination level or even final destination level by specifying link information based on whatever information extracted from all steps before the point where a semi-link is to be generated. An example of source-level partial hyperlinking is shown in Figure 14. It comprises source identifier 12, source anchor generator 14, initial semi-link generator 16, and link management 32 of the generalized process. In this case, a link specification is specified in the source

possible to generate all anchors and links through the entire hyperlinking process to achieve the same precision and completeness of a static hyperlinking with incremental processing capability.

5 Depending on the applications and the overhead that is tolerable when browsing a document for the first time, dynamic hyperlinking at the intermediate destination level and the final destination level can also be configured from the generalized process. An
10 implementation can provide a list of different types of hyperlinking as options to the user at browsing time.

 In summary, the present invention includes the following:

 1. A generalized automatic hyperlinking process
15 (GHP) is designed based on a generalized hyperlinking specification language to support various hyperlinking paradigms including static, incremental, partial and dynamic hyperlinking.

 2. The generalized hyperlinking specification
20 language (GHSL) consists of source specifications, intermediate destinations and destination specifications.

 3. The specification is used to specify a list of patterns to identify the contents and attributes of a set of document objects that can be the sources of a link.
25 It consists of the following parts: (a) a document part is to describe a list of documents for hyperlink source addressing domain, (b) a pattern part consists of a list of pattern expressions and is to specify possible source variations of a type of link in documents, (c) a context
30 part is to link sources constraint context under document domain, (d) an anchor part is to specify a location where an anchor can be inserted in the source document, (e) a

link part is to specify updates to the link information "stored" in the content and attributes of an anchor.

4. The anchor and link specification provides a unique modular design of a complete link information. It can support various hyperlinking paradigms since anchor, source or destination link information could be found separately at different hyperlinking stages such as author-time, run-time, etc....

5. The intermediate destination specifications are similar to the source specifications except that a list of labels for identifying source or intermediate destinations at the beginning. All variables in current intermediate destination specifications should come from specified source and intermediate destination specifications.

6. The final destination specification is similar to intermediate destination specifications except its label is never used by other specifications. In addition, its anchor part is often not necessary since it is the last destination point of hyperlinks.

7. The generalized automatic hyperlinking process consists of the followings steps:

Step 1- identify the sources of a type of link from source specification.

Step 2- generate anchors

Step 3 - generate initial semi-links

Step 4 - identify intermediate destinations from intermediate destination specifications

Step 5 - generate intermediate anchors

Step 6 - generate intermediate semi-links

Step 7 - generate intermediate links

Step 8 - identify destination of a type of link from destination specification

Step 9 - generate final semi-links
Step 10- generate final links
Step 11- provide APIs for storing and organizing
all anchors, semi-links and final-links
5 Step 12 - provide link database
Step 13 - run-time link browsing
Step 14 - run-time link interpretation for both
semi-links and final-links
Step 15 - document browsing.

10 8. The static hyperlinking with intermediate links
process is a specialized case of GHP and consists of
source identifier 12, source anchor generator 14,
intermediate destination identifier 18, intermediate
anchor generator 20, intermediate link generator 22,
15 destination identifier 26, final link generator 30 and
link management 32. This is shown in Figure 12.

9. The incremental hyperlinking process is a
specialized case of GHP and consists of source identifier
12, source anchor generator 14, intermediate destination
20 identifier 18, intermediate anchor generator 20,
intermediate link generator 22, destination identifier
26, final link generator 30, link management 32 and link
database 34. This is shown in Figure 13.

10. The source-level partial hyperlinking process is
25 a specialized case of GHP and consists of source
identifier 12, source anchor generator 14, initial semi-
link generator 16 and link management 32.

11. The source-level dynamic hyperlinking process is
a specialized case of GHP and consists of source
30 identifier 12, source anchor generator 14, initial semi-
link generator 16, link management 32, link browser 36
and document browser 40.

It is not intended that this invention be limited to the hardware or software arrangement or operational procedures shown disclosed. This invention includes all of the alterations and variations thereto as encompassed
5 within the scope of the claims as follows.

0040133 09299
0040133 09299

CLAIMS:

1. A generalized automatic hyperlinking system comprising:

- 5 source-level partial hyperlinking;
 source-level dynamic hyperlinking;
 static hyperlinking;
 static hyperlinking with intermediate links; and
 incremental hyperlinking.

10

2. A generalized automatic hyperlinking system as claimed in claim 1 wherein said source-level partial hyperlinking comprises:

- a source identifier;
15 a source anchor generator connected to said source identifier;
 an initial semi-link generator connected to said source anchor generator; and
 link management connected to said initial semi-link
20 generator.

3. A generalized automatic hyperlinking system as claimed in claim 1 wherein said source-level dynamic hyperlinking comprises:

- 25 a source identifier;
 a source anchor generator connected to said source identifier;
 an initial semi-link generator connected to said source anchor generator;
30 link management connected to said initial semi-link generator;
 a link browser connected to said source identifier and said link management; and
 a document browser connected to said link browser.

4. A generalized automatic hyperlinking system as claimed in claim 1 wherein said static hyperlinking comprises:

- 5 a source identifier;
- a source anchor generator connected to said source identifier;
- an intermediate destination identifier connected to said source anchor generator;
- 10 a destination identifier connected to said intermediate destination identifier;
- a final link generator connected to said destination identifier; and
- link management connected to said final link
- 15 generator.

5. A generalized automatic hyperlinking system as claimed in claim 1 wherein said static hyperlinking with intermediate links comprises:

- 20 a source identifier;
- a source anchor generator connected to said source identifier;
- an intermediate destination identifier connected to said source anchor generator;
- 25 an intermediate anchor generator connected to said intermediate destination identifier;
- an intermediate link generator connected to said intermediate anchor generator;
- a destination identifier connected to said
- 30 intermediate link generator;
- a final link generator connected to said destination identifier; and

link management connected to said final link generator.

6. A generalized automatic hyperlinking system as
5 claimed in claim 1 wherein said incremental hyperlinking comprises:

- a source identifier;
- a source anchor generator connected to said source identifier;
- 10 an intermediate destination identifier connected to said source anchor generator;
- an intermediate anchor generator connected to said intermediate destination identifier;
- an intermediate link generator connected to said
- 15 intermediate anchor generator;
- a destination identifier connected to said intermediate link generator;
- a final link generator connected to said destination identifier;
- 20 link management connected to said source anchor generator, said intermediate anchor generator; said intermediate link generator and said final link generator; and
- a link database connected to said link management.

25

7. A generalized automatic hyperlinking system comprising:

- a source identifier;
- a source anchor generator connected to said source
- 30 identifier;
- an initial semi-link generator connected to said source anchor generator; and

link management connected to said initial semi-link generator.

8. A generalized automatic hyperlinking system as
5 claimed in claim 7 further comprising:

a link browser connected to said source identifier
and said link management; and

a document browser connected to said link browser.

10 9. A generalized automatic hyperlinking system
comprising:

a source identifier;

a source anchor generator connected to said source
identifier;

15 an intermediate destination identifier connected to
said source anchor generator;

a destination identifier connected to said
intermediate destination identifier;

a final link generator connected to said destination
20 identifier; and

link management connected to said final link
generator.

10. A generalized automatic hyperlinking system as
25 claimed in claim 9 further comprising:

an intermediate anchor/link generator connected
between said intermediate destination identifier and said
destination identifier wherein said intermediate
anchor/link generator comprises:

30 an intermediate anchor generator connected to said
intermediate destination identifier; and

an intermediate link generator connected between said intermediate anchor generator and said destination identifier.

- 5 11. A generalized automatic hyperlinking system as claimed in claim 10:

wherein said link management is connected to said source anchor generator, said intermediate anchor generator and said intermediate link generator.

10

12. A generalized automatic hyperlinking system as claimed in claim 11 further comprising:

a link database connected to said link management.

- 15 13. A generalized automatic hyperlinking system as claimed in claim 11 further comprising:

an initial semi-link generator connected to said source anchor generator and said link management;

- 20 an intermediate semi-link generator connected to said intermediate anchor generator and said link management; and,

a final semi-link generator connected to said destination identifier and said link management.

- 25 14. A generalized automatic hyperlinking system as claimed in claim 13 further comprising:

a link browser connected between said source identifier and said link management.

- 30 15. A generalized automatic hyperlinking system as claimed in claim 14 further comprising:

a document browser connected to said link browser.

16. A generalized automatic hyperlinking system as claimed in claim 14 further comprising:
a link interpreter connected to said link browser.

5 17. A generalized automatic hyperlinking system as claimed in claim 16 further comprising:
a document browser connected to said link browser.

18. A method for automatic hyperlinking comprising the
10 steps of:
identifying a source;
generating a source anchor;
generating an initial semi-link; and
utilizing link management.

15 19. A method for automatic hyperlinking as claimed in claim 18 further comprising the steps of:
utilizing a link browser; and
utilizing a document browser.

20 20. A method for automatic hyperlinking comprising the steps of:
identifying a source;
generating a source anchor;
25 identifying an intermediate destination;
identifying a destination;
generating a final link; and
utilizing link management.

30 21. A method for automatic hyperlinking as claimed in claim 20 further comprising the steps of:

generating an intermediate anchor/link; wherein
generating said intermediate anchor/link comprises the
steps of:

- generating an intermediate anchor; and
- 5 generating an intermediate link.

22. A method for automatic hyperlinking as claimed in
claim 21 further comprising the steps of:
 utilizing a link database.

10

23. A method for automatic hyperlinking as claimed in
claim 21 further comprising the steps of:
- generating an initial semi-link;
 - generating an intermediate semi-link; and
 - 15 generating a final semi-link.

24. A method for automatic hyperlinking as claimed in
claim 23 further comprising the steps of:
 utilizing a link browser.

20

25. A method for automatic hyperlinking as claimed in
claim 23 further comprising the steps of:
- utilizing a link interpreter; and
 - utilizing a document browser.

25

26. A generalized automatic hyperlinking system
comprising:

- source identifier means;
- source anchor generator means connected to said
- 30 source identifier means;
- initial semi-link generator means connected to said
- source anchor generator means;

intermediate destination identifier means connected
to said source anchor generator means;

intermediate anchor generator means connected to said
intermediate destination identifier means;

5 intermediate link generator means connected to said
intermediate anchor generator means;

intermediate semi-link generator means connected to
said intermediate anchor generator means;

10 destination identifier means connected to said
intermediate link generator means;

final semi-link generator means connected to said
destination identifier means;

final link generator means connected to said
destination identifier means;

15 link management means connected to said initial semi-
link generator means, said source anchor generator means,
said intermediate semi-link generator means, said
intermediate anchor generator means, said intermediate
link generator means, said final semi-link generator
20 means and said final link generator means;

link database means connected to said link management
means;

link browser means connected to said link management
means and said source identifier means;

25 link interpreter means connected to said link browser
means; and

document browser means connected to said link browser
means.

Abstract of the Invention

5 A generalized hyperlinking system interactively
creates hyperlinks one a time or automatically in mass
production, statically at authoring time or dynamically
at browsing time. A Generalized Hyperlink Specification
Language (GHSL) allows for the author to specify patterns
and contexts for identifying sources and destinations of
10 links in all media and define link information as
interfaces between hyperlinking modules. The generalized
automatic hyperlinking system includes a source
identifier, a source anchor generator, an initial semi-
link generator, an intermediate destination identifier,
15 an intermediate anchor generator, an intermediate link
generator, an intermediate semi-link generator, a
destination identifier, a final semi-link generator, a
final link generator, link management, a link database, a
link browser, a link interpreter and a document browser.

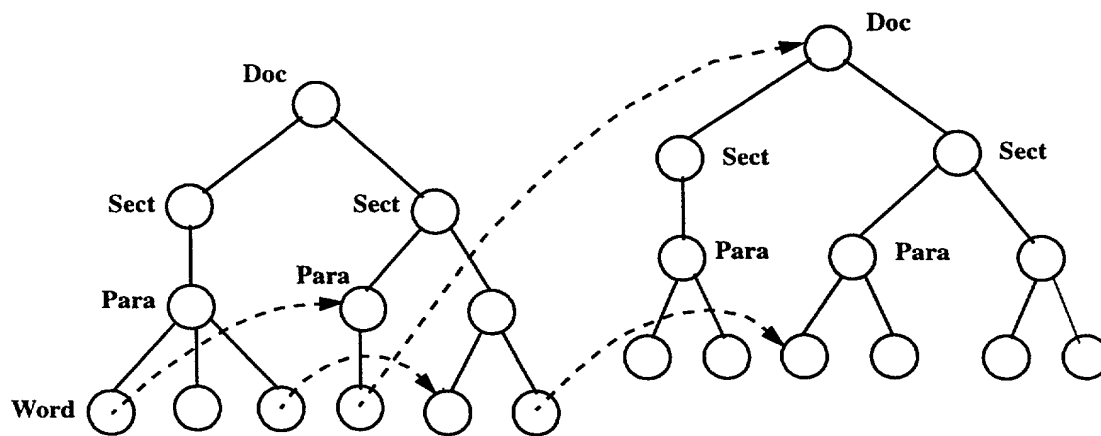


Fig. 1. Examples of Document Hyperlinks

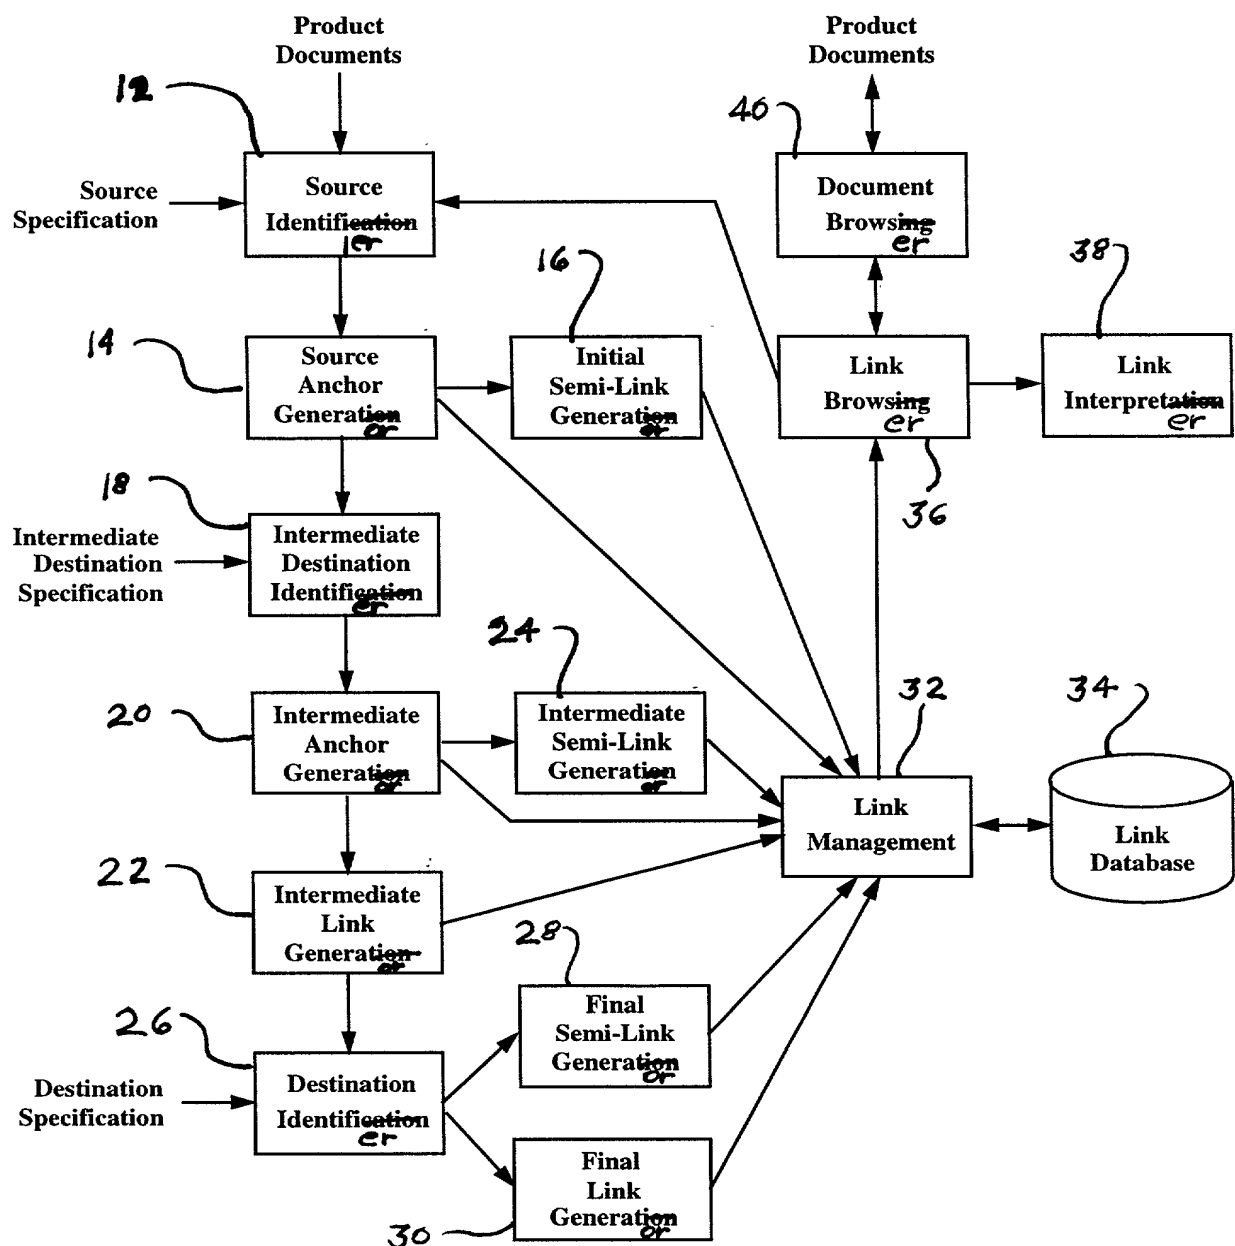


Fig. 2. Generalized Hyperlinking
System

source <label> : <description>

- document
 - <list of document references>
- end
- pattern
 - <list of pattern specifications>
- end
- context
 - <list of context specifications>
- end
- anchor
 - <list of anchor specifications>
- end
- link
 - <list of link specifications>
- end

end

Fig. 3. Source Specification

<pattern specification> ::= <sequence of pattern expressions>
 <pattern expression> ::= <pattern term> | <pattern assignment>
 <pattern term> ::= <subpattern> | <subpattern extraction>
 <subpattern extraction> ::= "/" <subpattern> "/"
 <pattern assignment> ::= <new variable> "=" <pattern term> |
 "{ " <pattern term> "/" <new variable> "}"
 <subpattern> ::= " <sequence of characters> " |
 "[" <subset of characters> "]" <number of repetitions> |
 "[^ " <subset of characters> "]" <number of repetitions>
 <number of repetitions> ::= "1" | "2" | "3" | ... | "?" | "*" | "+"

Fig. 4. Pattern Specification

```

<context specification> ::= <context expression>
<context expression> ::= <context term> | <context assignment>
<context term> ::= <document object> | <variable> |
    <document object> <object relationship> <document object> |
    <document object> <object relationship> <context expression> |
    <context expression> <object relationship> <document object> |
    <context expression> <object relationship> <context expression>
<context assignment> ::= <new variable> ":" <context term> |
    "{" <context term> "/" <new variable> "}"
<object relationship> ::= "contained" | "inside" | "child-of" | "descendent-of" |
    "containing" | "parent-of" | "ancestor-of" | "sibling-of"
<document object> ::= "<" <object name> ">" |
    "<" <object name> <attribute list> ">"
<attribute list> ::= <attribute> <attribute> ...
<attribute> ::= <attribute name> "=" <value>

```

Fig. 5. Context Specification

<anchor specification> ::= <anchor structure transformation>
 <anchor structure transformation> ::= <source context> “=>” <anchor context>
 <source context> ::= <source object list>
 <source object list> ::= <source object> <source object> ...
 <source object> ::= <document object> | <object assignment> | <variable>
 <object assignment> ::= <new variable> “:” <document object> |
 “{” <document object> “/” <new variable> “}”
 <anchor context> ::= <target object list>
 <target object list> ::= <target object> <target object> ...
 <target object> ::= <new object> | <variable>

Fig. 6. Anchor Specification

<link specification> ::= <link modification list>
 <link modification list> ::= <link modification> <link modification> ...
 <link modification> ::= <anchor content modification> | <link attribute modification>
 <anchor content modification> ::= <object variable> <link operator> <link value> “;”
 <link attribute modification> ::= <link attribute> <link operator> <link value> “;”
 <link attribute> ::= <object variable> “.” <attribute name>
 <link operator> ::= “=” | “+=”
 <link value> ::= <any string> | <link record>
 <link record> ::= “{” <link assignment list> “}”
 <link assignment list> ::= <link field assignment> <link field assignment> ...
 <link field assignment> ::= <link field> “=” <link value> “;”
 <link field> ::= <link id> | <link specification label> | <link description> |
 <link category> | <link type> | <link subtype> | <destination type> |
 <destination reference> | <parameter list>
 <destination reference> ::= <object id> | <object path> | <script>
 <parameter list> ::= <parameter> <parameter> ...

Fig. 7. Link Specification

source S101: "KKS numbers"

```
document
  31.sgm;
end
pattern
  p = "MB"[A-Z][0-9]2[A-Z]2[0-9]3;
end
context
  <AnyDocX><ParaX, ParaX2, ParaX3, ParaX4, ParaX5>p</></>;
end
anchor
  p => { <KKSNum Name=unique-name("NA")>p</> / a };
end
link
  a.Linkend += { link type = "Schematic Diagram";
                 destination reference = p;  }
end
end
```

Fig. 8. Example of Source Specification

intermediate <label> : <description>

```
    source
      <list of source and intermediate destination labels>
    end
    document
      <list of document references>
    end
    pattern
      <list of pattern specifications>
    end
    context
      <list of context specifications>
    end
    anchor
      <list of anchor specifications>
    end
    link
      <list of link specifications>
    end
  end
end
```

Fig. 9. Intermediate Destination Specification

destination <label> : <description>

source

<list of source and intermediate destination labels>

end

...

end

Fig. 10. Destination Specification

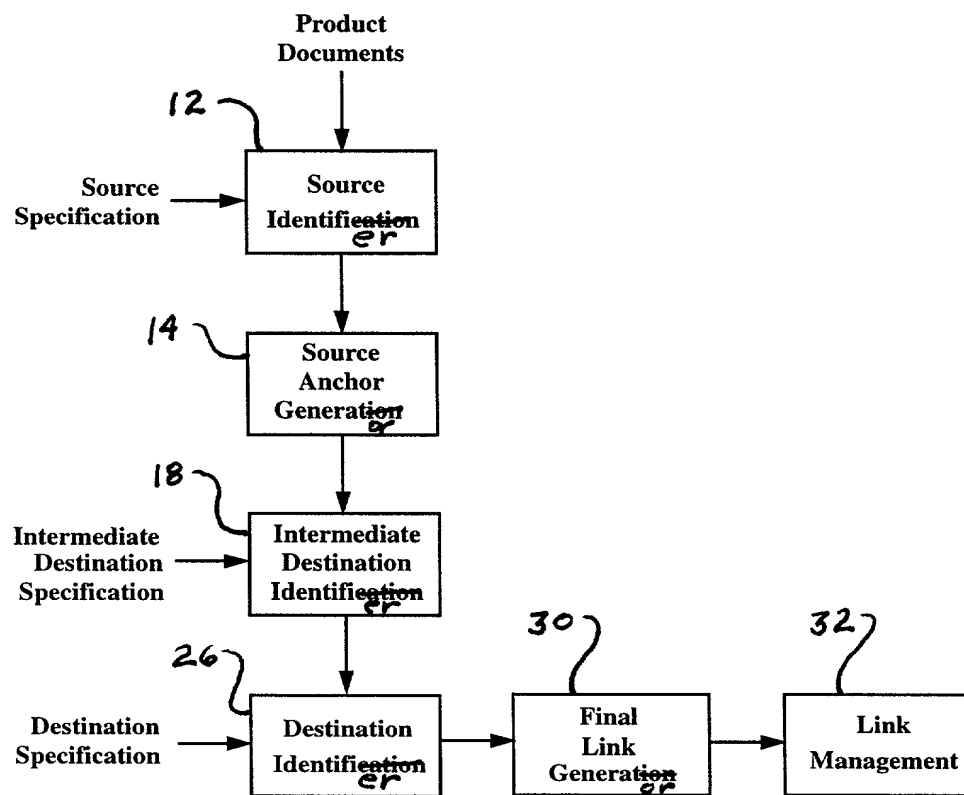


Fig. 11. Static Hyperlinking

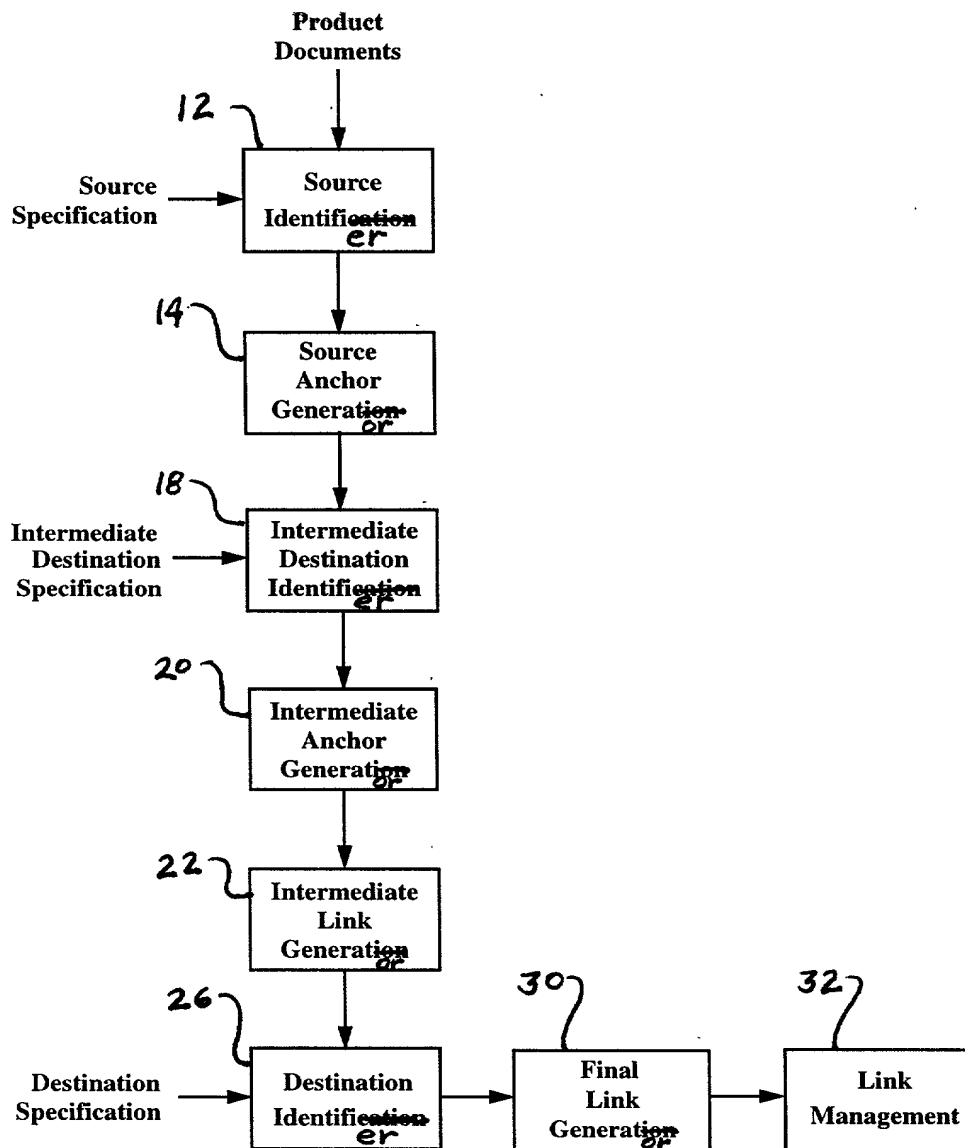


Fig. 12. Static Hyperlinking with Intermediate Links

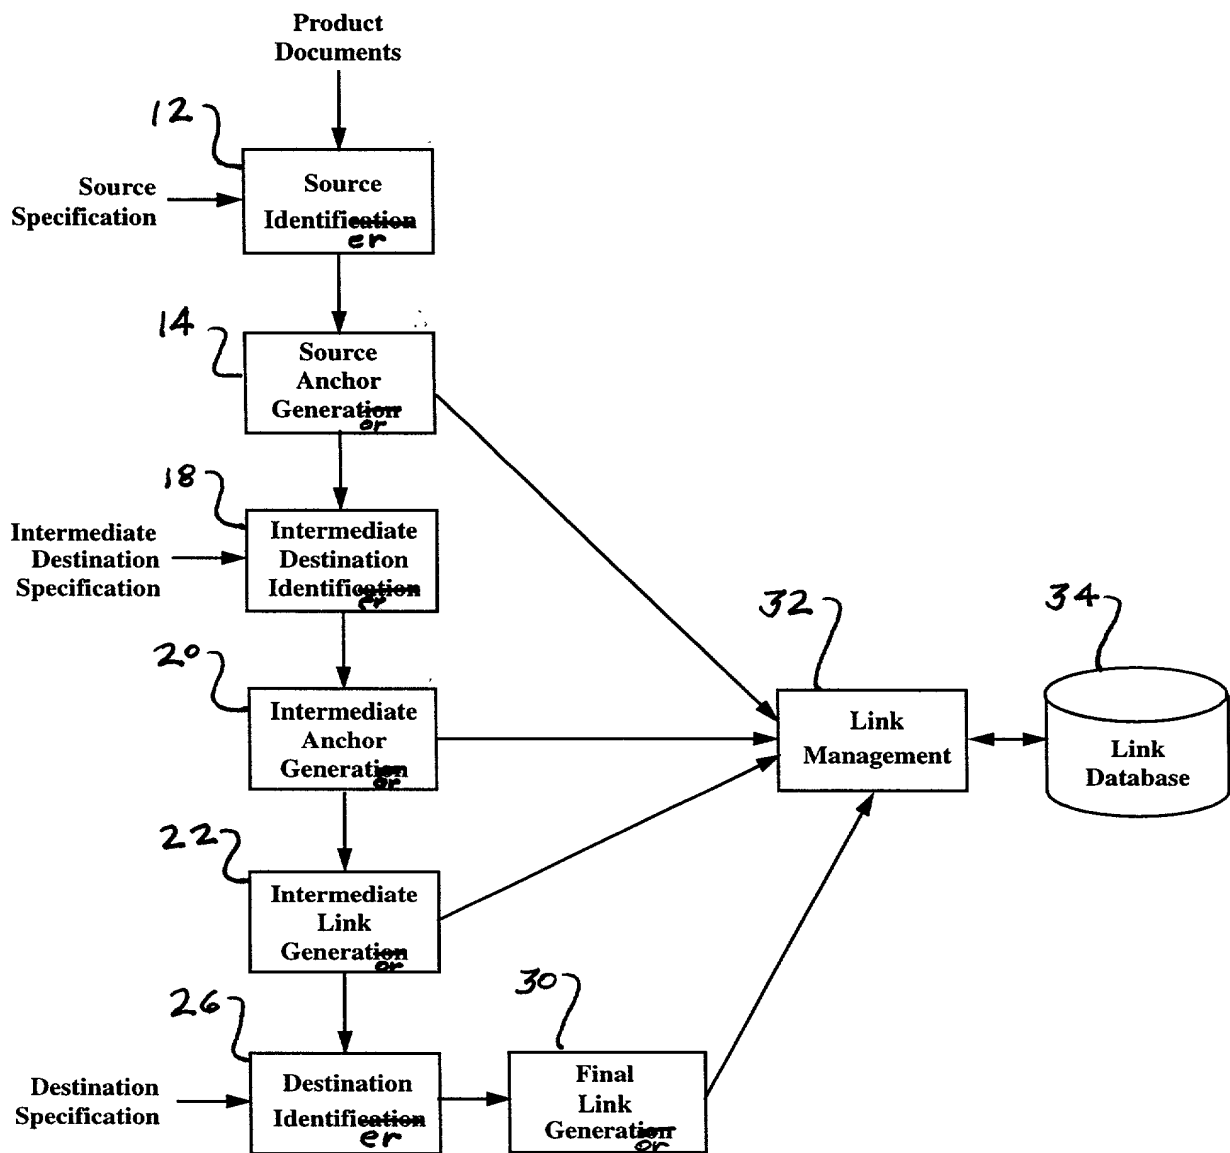


Fig. 13. Incremental Hyperlinking

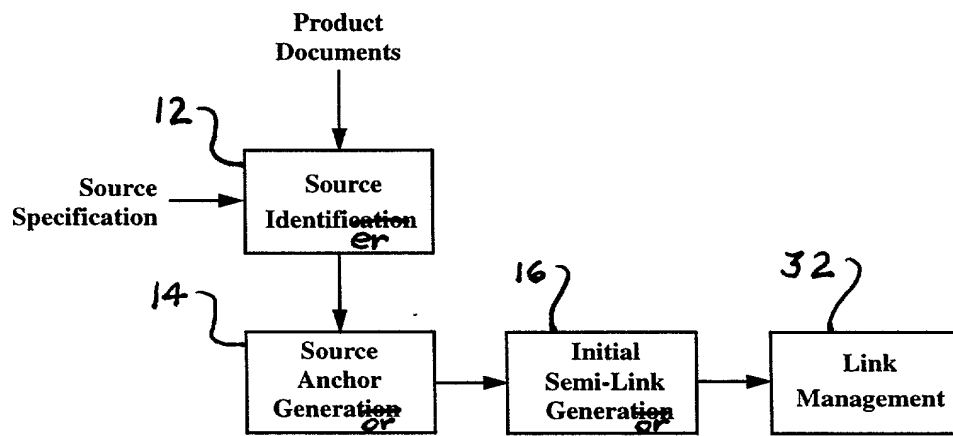


Fig. 14. Source-Level Partial Hyperlinking

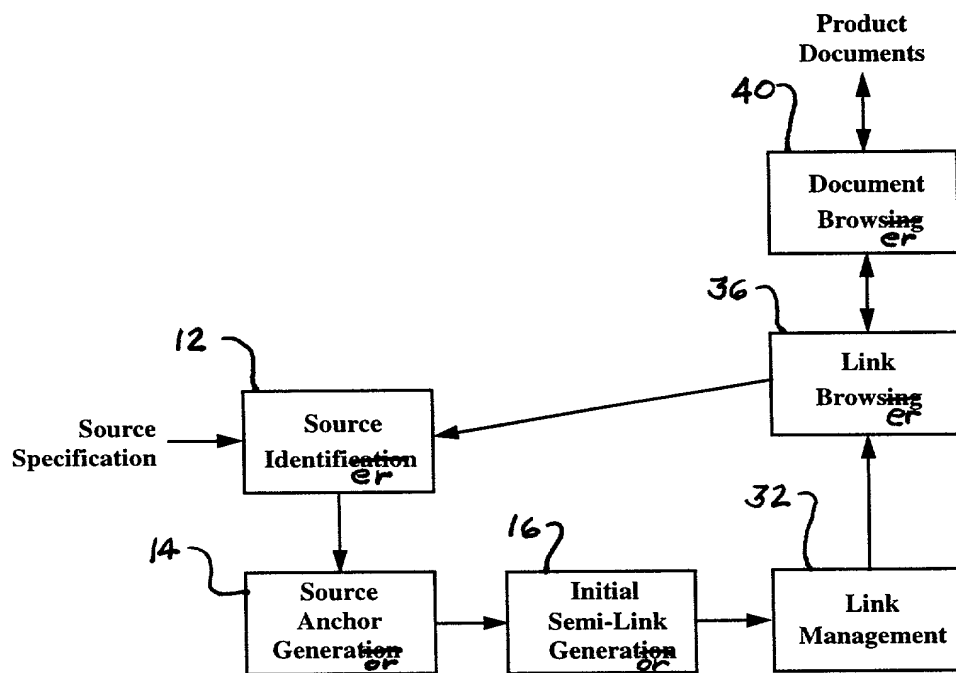


Fig. 15. Source-Level Dynamic Hyperlinking